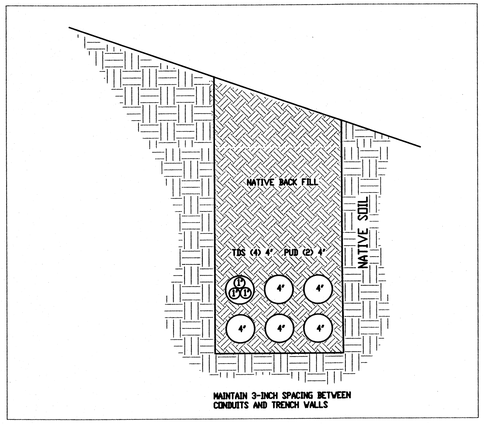

1 / C3.2 TYPICAL TRENCH STATION
13+00 - 14+91

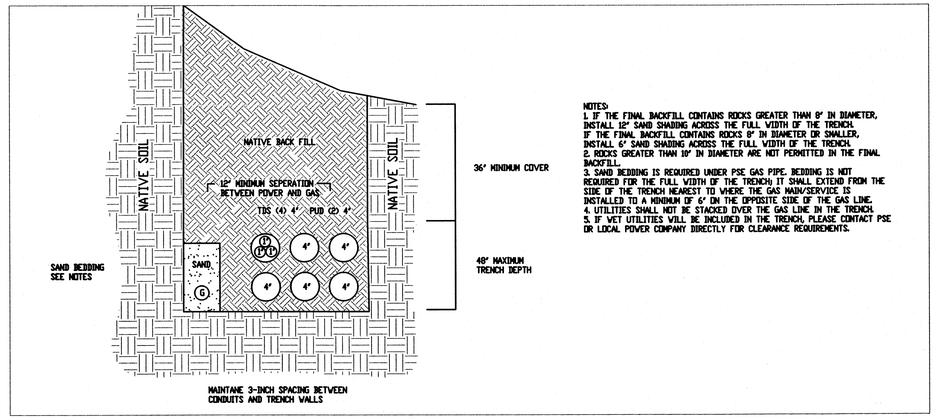

NOTES:
1. IF THE FINAL BACKFILL CONTAINS ROCKS GREATER THAN 8" IN DIAMETER, INSTALL 12" SAND SHADING ACROSS THE FULL WIDTH OF THE TRENCH. IF THE FINAL BACKFILL CONTAINS ROCKS 8" IN DIAMETER OR SMALLER, INSTALL 6" SAND SHADING ACROSS THE FULL WIDTH OF THE TRENCH.
2. ROCKS GREATER THAN 10" IN DIAMETER ARE NOT PERMITTED IN THE FINAL BACKFILL.
3. SAND BEDDING IS REQUIRED UNDER PSE GAS PIPE. BEDDING IS NOT REQUIRED FOR THE FULL WIDTH OF THE TRENCH; IT SHALL EXTEND FROM THE SIDE OF THE TRENCH NEAREST TO WHERE THE GAS MAIN/SERVICE IS INSTALLED TO A MINIMUM OF 6" ON THE OPPOSITE SIDE OF THE GAS LINE.
4. UTILITIES SHALL NOT BE STACKED OVER THE GAS LINE IN THE TRENCH.
5. IF WET UTILITIES WILL BE INCLUDED IN THE TRENCH, PLEASE CONTACT PSE OR LOCAL POWER COMPANY DIRECTLY FOR CLEARANCE REQUIREMENTS.

2 / C3.2 TYPICAL TRENCH STATION
11+25 - 13+00

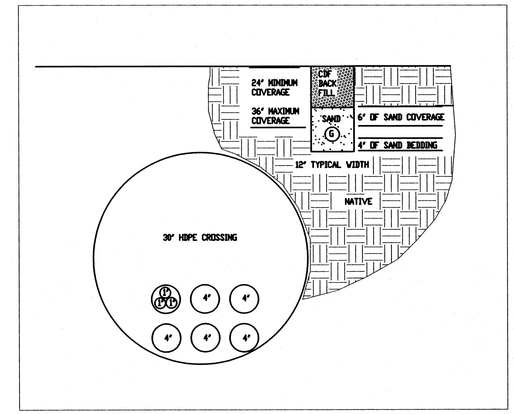

3 / C3.2 TYPICAL TRENCH STATION
10+25 - 11+25

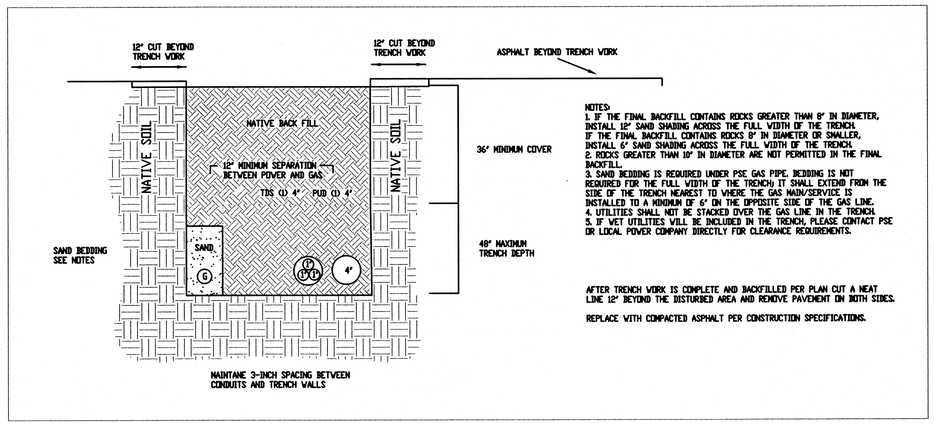

NOTES:
1. IF THE FINAL BACKFILL CONTAINS ROCKS GREATER THAN 8" IN DIAMETER, INSTALL 12" SAND SHADING ACROSS THE FULL WIDTH OF THE TRENCH. IF THE FINAL BACKFILL CONTAINS ROCKS 8" IN DIAMETER OR SMALLER, INSTALL 6" SAND SHADING ACROSS THE FULL WIDTH OF THE TRENCH.
2. ROCKS GREATER THAN 10" IN DIAMETER ARE NOT PERMITTED IN THE FINAL BACKFILL.
3. SAND BEDDING IS REQUIRED UNDER PSE GAS PIPE. BEDDING IS NOT REQUIRED FOR THE FULL WIDTH OF THE TRENCH; IT SHALL EXTEND FROM THE SIDE OF THE TRENCH NEAREST TO WHERE THE GAS MAIN/SERVICE IS INSTALLED TO A MINIMUM OF 6" ON THE OPPOSITE SIDE OF THE GAS LINE.
4. UTILITIES SHALL NOT BE STACKED OVER THE GAS LINE IN THE TRENCH.
5. IF WET UTILITIES WILL BE INCLUDED IN THE TRENCH, PLEASE CONTACT PSE OR LOCAL POWER COMPANY DIRECTLY FOR CLEARANCE REQUIREMENTS.

AFTER TRENCH WORK IS COMPLETE AND BACKFILLED PER PLAN CUT A NEAT LINE 12" BEYOND THE DISTURBED AREA AND REMOVE PAVEMENT ON BOTH SIDES.

REPLACE WITH COMPACTED ASPHALT PER CONSTRUCTION SPECIFICATIONS.

4 / C3.2 TYPICAL TRENCH IN PARKING LOT



1. ASPHALT CONCRETE PAVEMENT CLASS B 0.17' COMPACTED DEPTH (WEARING COURSE)
2. ASPHALT CONCRETE PAVEMENT CLASS B 0.17' COMPACTED DEPTH (WEARING COURSE)
3. CRUSHED SURFACING TOP COURSE (C.S.T.C) - 0.17' COMPACTED DEPTH
4. BALLAST - .50' COMPACTED DEPTH
5. NATIVE MATERIAL FILL WITH COMPACTABLE DENSITY FILL (CDF) THE ENTIRE TRENCH WIDTH WITHIN THE ROAD PRISM.

5 / C3.2 TYPICAL ROADWAY SECTION STATION
10+50 - 11+15

REV NO	DESCRIPTION
1	06/04/2010 PRC COMMENTS
-	04/15/2010 PLANS ISSUED

DESIGNED BY F. MCDONALD
DRAWN: C.JH
CHK:
ISSUE DATE 06/04/2010
PROJECT NO. QCV-CP-10-0003

FRED N. MCDONALD, STATE OF WASHINGTON, REGISTERED PROFESSIONAL ENGINEER
6/4/2010

TULALIP TRIBES

RESTAURANT UTILITIES

UTILITY TRENCH DETAILS

C3.2